










TPoster Series

Transparent LED Poster

Applications

- 
Advertising
- 
Science Museum Experience Hall
- 
Retail Shops
- 
Media Facade
- 
Showroom
- 
Car Dealers
- 
Supermarkets
- 
Consumer Electronic Stores
- 
Shopping Malls




Specification


Model	TPoster1.9-1800	TPoster1.9-3000	TPoster2.8	TPoster3.1	TPoster3.9-3500	TPoster3.9-5500
Pixel Pitch(mm)	H1.9-V3.9	H1.9-V3.9	H2.8-V5.6	H3.1-V3.1	H3.9-V7.8	H3.9-V7.8
Pixel Matrix Per Sq.m	129,024	129,024	61,952	104,058	32,768	32,768
Pixel Configuration	SMD1515	SMD1415	SMD1921	SMD1921	SMD1921	SMD1921
Brightness (nits)	1800	3000	4500	4500	3500	5500
Scan	1/14	1/14	1/16	1/16	1/8	1/8
Module Dimension	500x125mm / 1.64x0.41ft	500x125mm / 1.64x0.41ft	500x125mm / 1.64x0.41ft	500x125mm / 1.64x0.41ft	500x125mm / 1.64x0.41ft	500x125mm / 1.64x0.41ft
Screen Dimension	1000x2000mm / 3.28x6.56ft	1000x2000mm / 3.28x6.56ft	1000x2000mm / 3.28x6.56ft	1000x2000mm / 3.28x6.56ft	1000x2000mm / 3.28x6.56ft	1000x2000mm / 3.28x6.56ft
Cabinet Resolution	504x128	504x128	352x88	320x320	256x64	256x64
Transparency	30%	30%	50%	60%	70%	70%
Cabinet Material	CNC Aluminum	CNC Aluminum	CNC Aluminum	CNC Aluminum	CNC Aluminum	CNC Aluminum
Cabinet Weight	30kg	30kg	30kg	30kg	30kg	30kg
Power Con. (Max / Avg)	800 / 360 w/sqm	800 / 360 w/sqm	1600 / 720 w/sqm	1600 / 720 w/sqm	800 / 360 w/sqm	1600 / 720 w/sqm
Service Access	Front & Back	Front & Back	Front & Back	Front & Back	Front & Back	Front & Back
Refresh Rate (HZ)	1920	1920	1920	1920	1920	1920
Viewing Angle (H/V)	160 / 160	160 / 160	160 / 160	160 / 160	160 / 160	160 / 160
IP Rate	IP24	IP24	IP24	IP24	IP24	IP24
Operation Temperature	-40° ~ 45°	-40° ~ 45°	-40° ~ 45°	-40° ~ 45°	-40° ~ 45°	-40° ~ 45°
Input Voltage (AC)	100V or 240V	100V or 240V	100V or 240V	100V or 240V	100V or 240V	100V or 240V

* Specifications and photos are subject to change without prior notice.


Color Options & Dimension Options

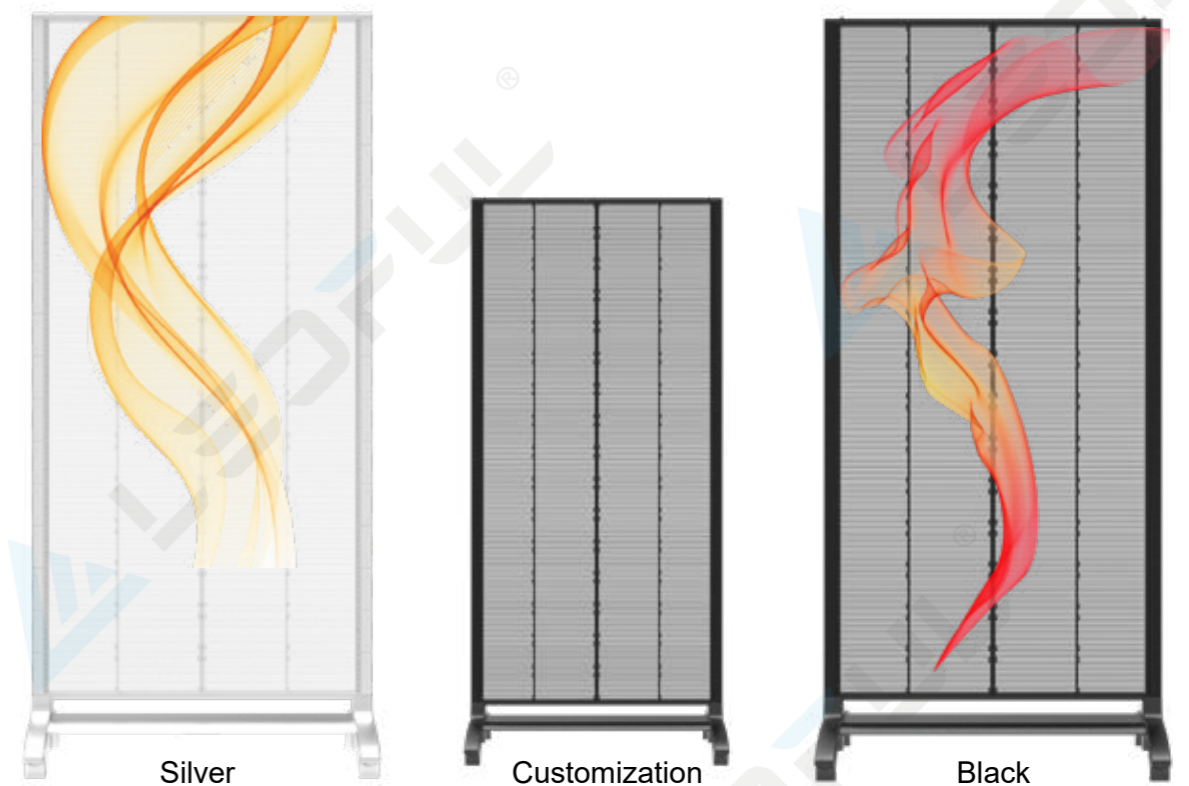

THREE Installation Options

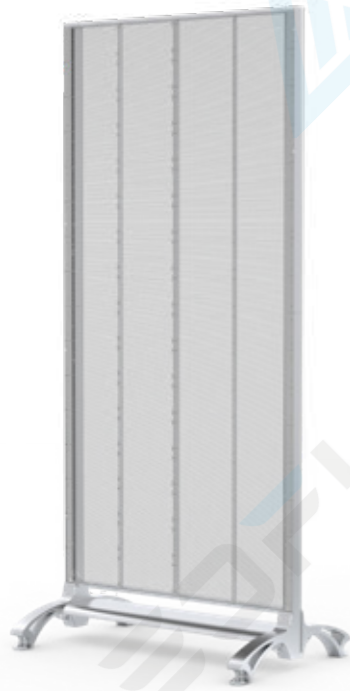

Fixed

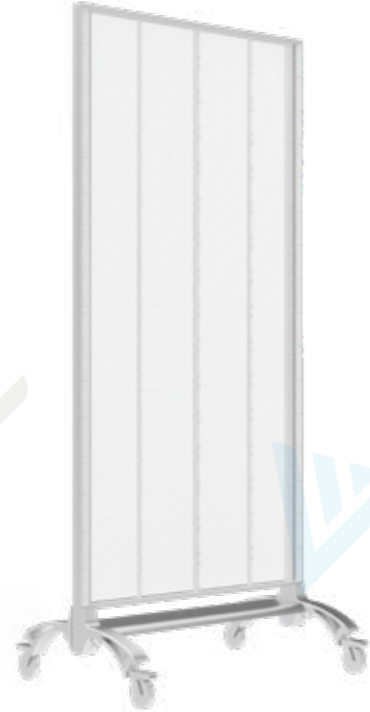


Moveable with Wheels



Hanging

How to Control TPoster?

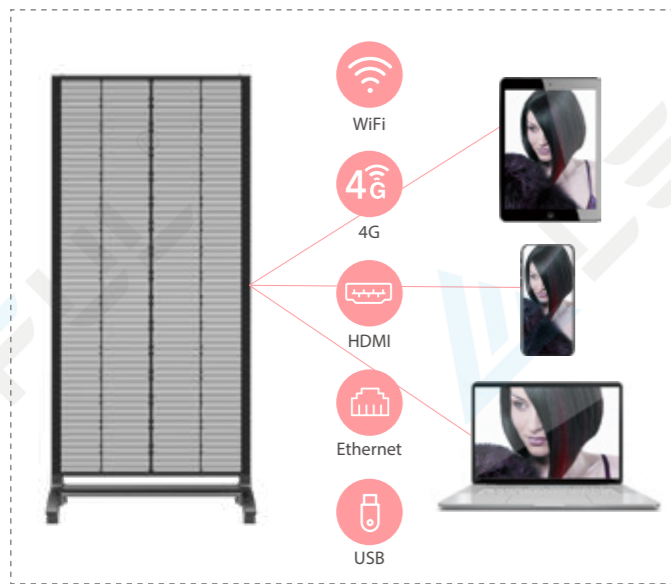

Cascade



Project Case



Features

- Plug and play**
 Plug in the power and poster can work
 Can be easily controlled by APP
- Highly stable**
 The new structure meets the requirements of hoisting, vertical installation and outdoor use
- Diversified control**
 Remote cluster control, easily control single and multiple screens at the same time
- Light and thin**
 The thickness of the screen is 3.5mm, and the product is about 30kg per
- Wide perspective**
 160° viewing angle, the screen can be viewed from multiple angles
- Fully customized**
 LEDFUL TPoster series can be customized according to site size, making full use of the site
- Highly transparent**
 High permeability, little effect on the lighting perspective of the glass curtain wall
- Easy installation/maintenance**
 Modular design, easy to assemble and install the cabinet